


FPG SERIES

RECESSED GRID FOOD PROCESSING

FOOD PROCESSING

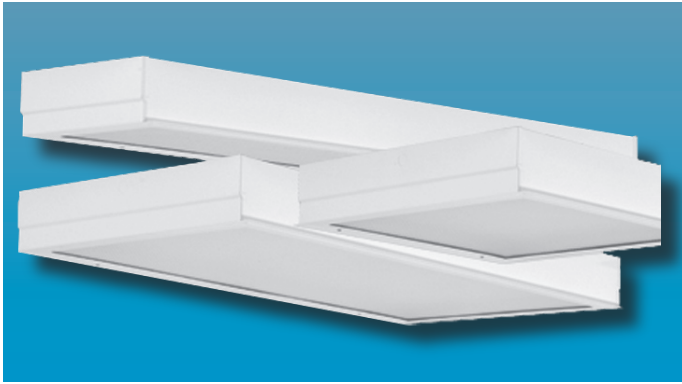

Specifier's Reference

Project Name	Type
Catalog No.	
Comments	

- **Listings/Certifications:** ETL (US/Canada).
NSF, Wet location listed

Specifications

- **Housing:** 20-gauge cold rolled steel "hole-free" housing with lapped and welded seams. Flattened 1/2" knockouts in top and ends of housing. Optional 18-gauge stainless steel or 16-gauge aluminum housing available.
- **Door:** 18-gauge cold rolled steel door frame with concealed pins hinges. Optional 18-gauge brushed stainless steel or 16 gauge aluminum door available.
- **Lens:** Standard .125" thick clear prismatic acrylic with smooth side exposed to facilitate cleaning. Held with continuous formed channels for positive retention. Optional lensing shown below.
- **Gasket:** One-piece closed cell neoprene gasket between door and housing. Perimeter of endplates sealed with silicone caulking.
- **Door Latch Screws:** Standard captive slotted flush head screws to secure door.
- **Lamps:** See below for lamping options. Lamps supplied by others.
- **Ballasts:** Standard universal voltage 120V through 277V electronic 90% power factor <10% THD. Other ballast options available.
- **Finish:** Standard baked white polyester powder coat paint finish. Optional AgION™ antimicrobial finish available.
- **Mounting:** Housing to fit 1" or 1-1/2" grid ceilings. Support above plenum by others.

Ordering Information

Example: **FPG - 24 - 6 - T5 - EB - A - SS - UNV**

Series	Size	No. Lamps	Lamp Type	Ballast Type	Lens Type	Options	Voltage
FPG	- 24 -	- 6 -	- T8 -	- EB10IS -	- A -	- EMG1 -	- UNV
	2 X 4 Unit	Six Lamps (2X4 or 2X2 only)	32W (2X4) 17W (2X2) 32W (1X4)	Electronic Ballast <10% THD Instant Start	.125 Prismatic Acrylic (standard)	1-Lamp Emergency Power Pak	-347V
	- 22 -	- 4 -	- T5 -	- SB -	- E -	- EMG2 -	
	2 X 2 Unit	Four Lamps (2X4 or 2X2 only)	28W (2X4) 14W (2X2) 28W (1X4)	Specified Ballast	.125 Prismatic Polycarbonate	2-Lamp Emergency Power Pak	
	- 14 -	- 2 -	- T5HO -		- F -	- SS -	
	1 X 4 Unit	Two Lamps	54W (2X4) 24W (2X2) 54W (1X4)		.187 Prismatic Polycarbonate	18ga Stainless Steel Housing with 18ga Brushed Flange, Brushed Stainless Steel Door	
						- AL -	
						16ga Painted Aluminum Housing, 16ga Painted Aluminum Door	
						- AG -	
						AgION™ Antimicrobial Protection in Powder Coat Paint	
						- GMF -	
						Slo Blo Fusing	


Note: Contact Factory For Additional Configurations.

Morlite
TOUGH SITES TOUGH LITES

1805 Pittsburgh Ave, Erie, PA 16502 • 800-865-5954 • Fax 800-667-9959



Dimensions & Mounting

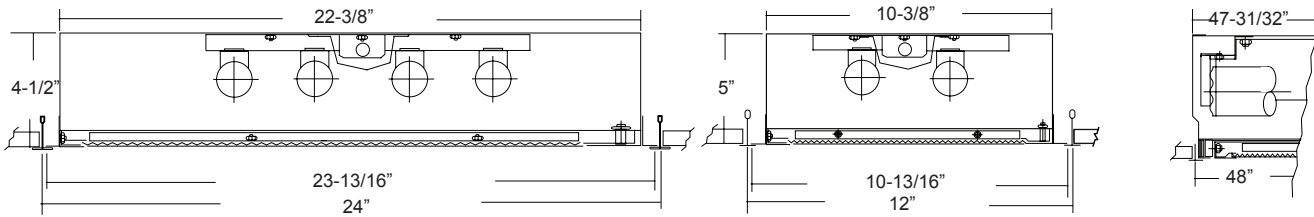


Photometry

Catalog #FPG-24-4-T8
Luminaire Efficiency: 77%
Lamps: 4 - FO32/T8/735
Input Wattage: 128 Watts
Ballast Type: Electronic
Ballast Factor: 1.0


Floor	20%													
	80%				70%				50%					
Ceilings	70	50	30	10	70	50	30	10	50	30	10	50	30	10
Walls(%)	0	90	90	90	90	88	88	88	88	84	84	84	84	84
	1	83	81	78	75	82	79	76	74	76	74	74	72	72
	2	77	72	68	64	75	70	66	63	68	65	65	62	62
	3	71	64	59	55	70	63	58	54	61	57	57	53	53
	4	66	58	52	48	64	57	52	47	55	51	51	47	47
	5	61	53	47	42	60	52	46	42	50	45	45	41	41
	6	57	48	42	37	56	47	41	37	46	41	41	37	37
	7	53	44	38	34	52	43	37	33	42	37	37	33	33
	8	50	40	34	30	49	40	34	30	39	34	34	30	30
	9	47	37	31	28	45	37	31	27	36	31	31	27	27
	10	44	34	29	25	43	34	29	25	33	28	28	25	25

Candlepower Distribution

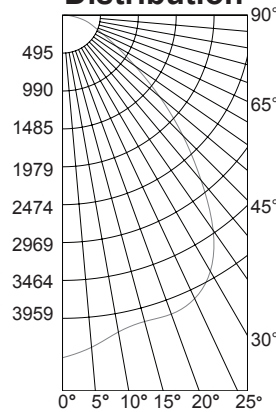

Catalog #FPG-24-4-T5HO
Luminaire Efficiency: 77%
Lamps: 4 - FO54/T5HO/735
Input Wattage: 112 Watts
Ballast Type: Electronic
Ballast Factor: 1.0

Candlepower Distribution

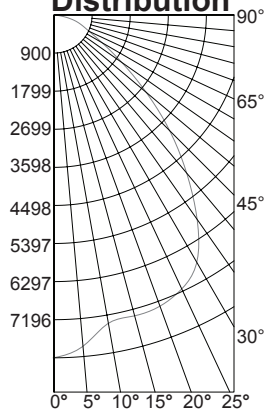

Floor	20%													
	80%				70%				50%					
Ceilings	70	50	30	10	70	50	30	10	50	30	10	50	30	10
Walls(%)	0	92	92	92	92	90	90	90	90	86	86	86	86	86
	1	86	83	80	78	84	81	79	76	78	76	74	74	74
	2	79	74	69	66	77	73	68	65	70	66	63	63	63
	3	73	66	61	57	72	65	60	56	63	59	55	55	55
	4	68	60	54	49	66	59	53	49	57	52	48	48	48
	5	63	54	48	43	62	53	48	43	52	47	43	43	43
	6	59	49	43	39	57	49	43	38	47	42	38	38	38
	7	55	45	39	35	53	45	39	35	43	38	34	34	34
	8	51	42	35	31	50	41	35	31	40	35	31	31	31
	9	48	38	32	28	47	38	32	28	37	32	28	28	28
	10	45	36	30	26	44	35	30	26	34	29	26	26	26

Options

Antimicrobial: Optional Agion™ Antimicrobial protection using silver technology inhibits bacterial colonization on metal interior and exterior surfaces. Agion™ antimicrobial FDA recognized and EPA registered, meeting all applicable EPA standards.

Closed Cell Neoprene Gasket Standard



.125 Prismatic Acrylic Lens Standard