



Optional Grounded Convenience Outlet Available



Sealed reflector to insure no stray light can escape and expose film.

EASTMAN KODAK DARKROOM FILTERS

Colors representative, not actual.

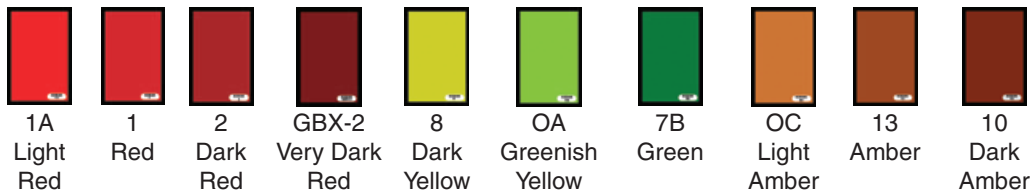

NOTE: KODAK RECOMMENDED MAXIMUM LAMP WATTAGE: 15WATTS. HIGHER WATTAGE MAY MELT FILTER.



Specifications

- Housing: 20 gauge die-formed and welded steel. Optional stainless steel housing available.
- Door: Fully gasketed one piece 20 gauge stainless steel hinged door.
- Lens: Standard Pattern 73 tempered glass lens for general illumination.
- Filter: Eastman Kodak darkroom safelight filter(s). See below for quantities included. Filter choice by others.
- Finish: Standard matte black polyester powder coat paint finish.
- Fasteners: Knurled nickel plated brass thumb screws for easy access.
- Lamps: General illumination 2-75 watt A-19 lamps by others. Filter compartment - maximum 15 watt A-15 lamp by others. This is the highest wattage recommended by Eastman Kodak. Higher wattage may damage filter.
- Listings/Certifications: Wet location, ETL (US/Canada) listing

The Darkroom Safelight does not provide ambient illumination for any other activity than processing film. Safelight filter colors are determined by the material being processed, what spectrum of light it is sensitive to and the film speed. Vista Lighting cannot recommend filter colors. Some films can be processed with more illumination than others while some require complete darkness. Safelight filters gradually fade with use and must be periodically replaced.


Specifier's Reference

Project Name	Type
Catalog No.	
Comments	

Ordering Information

Mounting	Series	Size	Filter(s)	Options
VWM	UD	1214		
-VWM Wall Mounted	-UD Uplight Diffuser	-1214 One Compartment with uplight lens (Includes one filter)	-OA Greenish Yellow -OC Light Amber -1 Red -1A Light Red -2 Dark Red -3 Dark Green -7B Green -8 Dark Yellow -10 Dark Amber -13 Amber -GBX-2 Dark Red	-RSW Rocker Switch for Control of Uplight -PCS Pull Chain Switch for Control of Downlight -CO-B Black Grounded Convenience Outlet

Mounting & Dimensions

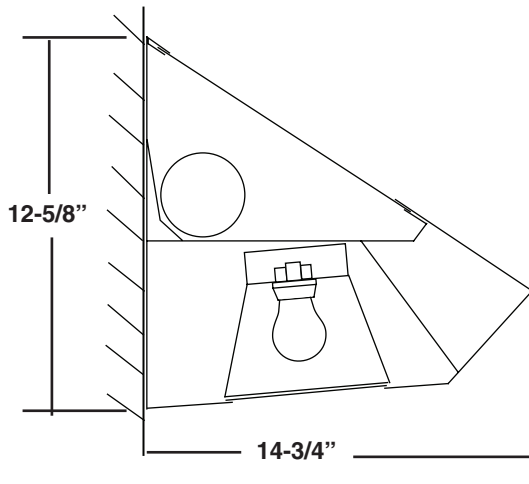

7/32" Diameter Mounting Holes

